

**DS-D4248FO-CLFL
P4.8 Outdoor Fixel LED Display Unit**



- Support front and rear maintenance
- Using aluminum chassis with good heat dissipation, workable under 60 °C
- All series aluminum profile cabinets support IP67(F)/IP66(R)
- Apply unique technology, maximally saving 30% energy
- Various cabinet sizes, applying to diverse scenes
- The cabinets support customized 45° corner cut to realize 90° right-angle splicing


▪ Specification

	Model	DS-D4248FO-CLFL
Cabinet	Pixel Configuration	1R1G1B
	Pixel Pitch Category	P4.81
	Pixel Pitch	4.81 mm
	Modules Component	Aluminum Shell
	Dimensions (W × H × D)	500 mm × 500 mm × 97 mm (19.7" × 19.7" × 3.82")
	Resolution	104 × 208
	Area	0.5
	Weight	16.7 KG/PCS
	Pixel Density	43264 dots/m ²
	Lamp Board Housing	Yes
	Cabinet Material	Aluminum Profile
	Maintenance Method	Front/Back Maintenance
	Cabinet Flatness	0.8 mm
Protection Level	IP67(F)/IP66(R)	
Display	White Balance Brightness	4500
	Color Temperature	3000 K to 10000 K
	Viewing Angle	160° (H)/80° (V)
	Contrast Ratio	5000:1
	Color Uniformity	≥ 95%
	Brightness Uniformity	≥ 95%
Processing Performance	Driving Method	Constant Current
	Frame Frequency	50/60 HZ
	Refresh Rate	3840
	Grey Level	14 bit
	Display Color	DCI-P3 > 85%
Power	Power Supply	110 to 220
	Max. Consumption	650
	Average Consumption	210
Working Environment	Working Temperature	-40 to 60 °C
	Working Humidity	10% to 95% RH (non-condensing)
	Storage Humidity	10% to 95% RH (non-condensing)
	Storage Temperature	-40 to 60 °C
General	Gross Weight	160
	Package Dimensions (W × H × D)	1080 × 970 × 570 mm
	Lifespan	100000 Hours

▪ Available Model

DS-D4248FO-CLFL

▪ Dimension

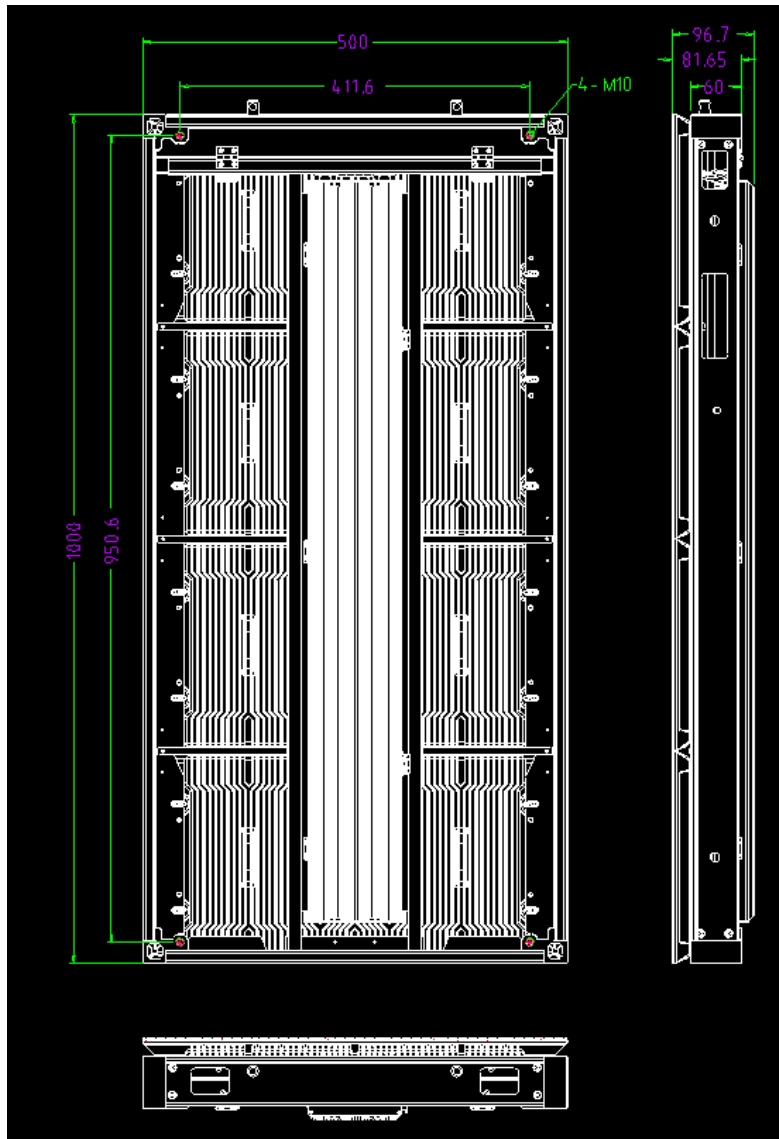

Unit: mm