

# DHI-ASI7213YO-V3-T0

## Face Recognition Access Standalone



- 7-inch LCD display with resolution of 1024 × 600
- 2 MP CMOS, WDR
- Auto fill light reduces light pollution
- Can hold 50,000 users, 50,000 face images, 50,000 cards, 50,000 password, 50 administrators, and 100,000 records
- Support face, IC card, password unlock and unlock through their combinations
- With face detection box; the largest face among faces that appear at the same time is recognized first; the maximum face size can be configured on the web
- Face-camera distance: 0.3 m–1.0 m; human height: 0.9 m–2.4 m (lens-ground distance: 1.4 m)
- With face recognition algorithm, the access controller can recognize more than 360 positions on human face
- Face recognition speed: 0.35 s per face
- Support liveness detection
- Accurate recognition in backlight and front light
- Various unlock status display modes protect user privacy
- Support enabling/disabling the temperature monitoring mode; temperature monitoring range is 30°C to 45°C (86°F to 113°F); temperature monitoring distance range is 1 cm–5 cm; temperature monitoring error is ≤0.3°C; report temperature anomaly alarm
- Support mask detection, report alarm of abnormal events without wearing a mask
- Support duress alarm, tamper alarm, intrusion alarm, door contact timeout alarm, and illegal card exceeding threshold alarm
- Support general users, patrol users, VIP users, guest users, and special users

### Technical Specification

#### System

Main Processor	Embedded Processor
Internet Protocol	IPv4, RTSP, RTP, TCP, UDP, P2P
OSDP Protocol	Yes
Interoperability	ONVIF; CGI
SDK and API	Support SDK

#### Basic

Display	7-inch display
Screen Type	Capacitive Screen
Resolution	600 (H) × 1024 (V)
Camera	1/2.8" 2MP CMOS high definition WDR dual camera
WDR	120 dB
Light Compensation	Auto white light Auto IR light
Status Indicator	1 indicator light. Red: Error; Green: Normal; Blue: Working
Voice Prompt	Yes
Casing	PC+ABS



#### Function

Unlock Mode	Card/Remote/Password/Face unlock and unlock through their combinations; Face unlock under temperature monitoring mode;
Card Reading Type	IC card
Period List	128
Holiday Period	128
First-Card Unlock	Yes
Remote Verification	Yes

Peripheral Card Reader	1 Wiegand
Multiple Authentication	Yes
Real-Time Surveillance	Yes
Web Configuration	Yes

## Performance

Card Reading Distance	5 cm
Face Recognition Range	Face-camera distance: 0.3 m–1.0 m Human height: 0.9 m–2.4 m
Face Verification Accuracy	99.5%
Face Recognition Time	0.35 s
Temperature Monitoring Range	30°C–45°C (86°F–113°F)
Temperature Monitoring Method	Wrist
Temperature Monitoring Error	≤ 0.3°C
Temperature Monitoring Environment	+10°C to +40°C (+50°F to +104°F)
Temperature Monitoring Distance	1cm–5cm

## Capacity

User Capacity	50,000
Face Image Capacity	50,000
Card Capacity	50,000
Password Capacity	50,000
Record Capacity	100,000 records

## Port

Wiegand	1 (input or output)
USB	1 × USB2.0 port
Network	1 × 100 Mbps network port
Alarm Input	2 (Switch quantity)
Alarm Output	2 (Relay)
Alarm Linkage	Yes
Exit Button	1
Door Status Detection	1
Lock Control	1

## Alarm

Anti-Passback	Yes
Tamper	Yes
Duress	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes


## General

Power Supply	Provided
Power Supply Mode	12V 1A DC
Power Consumption	≤ 12W
Product Dimensions	283.1 mm × 130.1 mm × 40.7 mm (11.14" × 5.12" × 1.60")
Packaging Dimensions	Controller packing: 380 mm × 235 mm × 124 mm (14.96" × 9.25" × 4.88") Protective case: 494 mm × 402 mm × 275 mm (19.45" × 15.83" × 10.83")
Operating Temperature	Temperature monitoring mode disabled: –10°C to 55°C (14°F to 131°F) Temperature monitoring mode enabled: 10°C to 40°C (50°F to 104°F)
Operating Humidity	5%RH–90%RH (non-condensing)
Gross Weight	1.9 kg (4.19 lb)
Installation	Bracket mount
Certifications	CE/FCC

## Ordering Information

Type	Model	Description
Face Recognition Access Controller	DHI-ASI7213YO-V3-T0	Dahua Face Recognition, IC Card, Password Face Recognition Access Standalone
Bracket	ASF172YV3-T0	Standing Bracket
Bracket	ASF172YV3/II-T0	Desktop Bracket

## Dimensions (mm[inch])

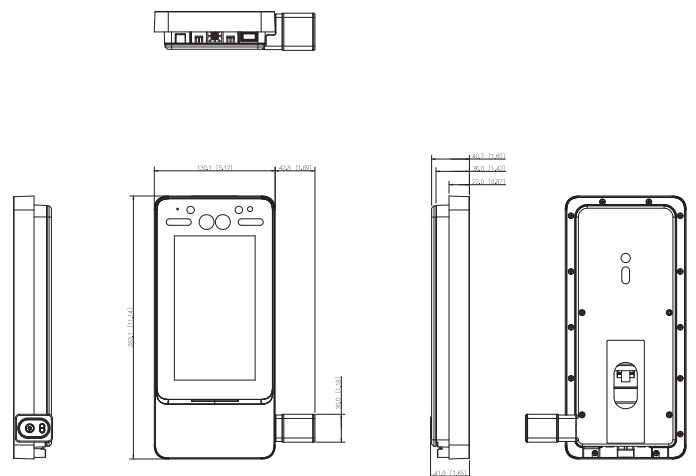

Application

